


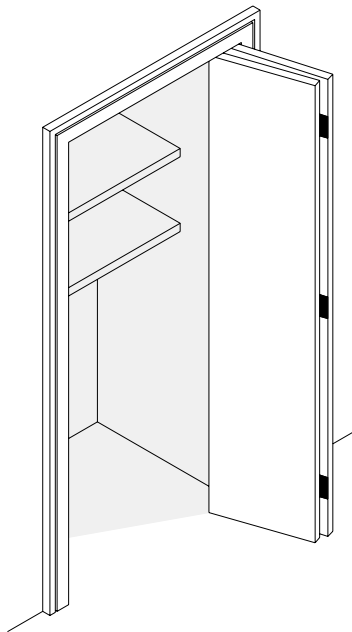

Hardware system for walk-in cabinet, hinged on one side, without floor guide, up to 30 kg (66 lbs.). (inlay or overlay)

Description


The Hawa Multifold 30 W is a supplement to the Hawa Multifold 30 with inlaying or full overlay sliding cabinet doors. It is attached on one side with concealed hinges and does not need a bottom guide. The hardware can be used for sliding to the left and right.

Applications

For use in interiors wherever quality and simple operation are required together with extremely smooth and stable motion, e.g. interior design, hotels, etc.



Features of the Hawa Multifold 30 W

- Maximum panel weight 30kg (66 lbs.) per panel pair 60 kg (132 lbs.)
- Maximum panel heights 2600 mm (8'6 ³/₈")
- Panel widths 200–500 mm (7 ⁷/₈" –1'7 ¹¹/₁₆")
- Panel thicknesses 19–25 mm (³/₄" – ⁶³/₆₄")
- Vertical groove width 3–5 mm (¹/₈" – ¹³/₆₄")
- Vertical adjustment ± 2 mm (³/₃₂")

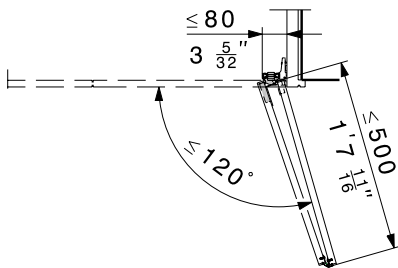


Construction

Designs incorporating inlaying and overlaying doors are possible.

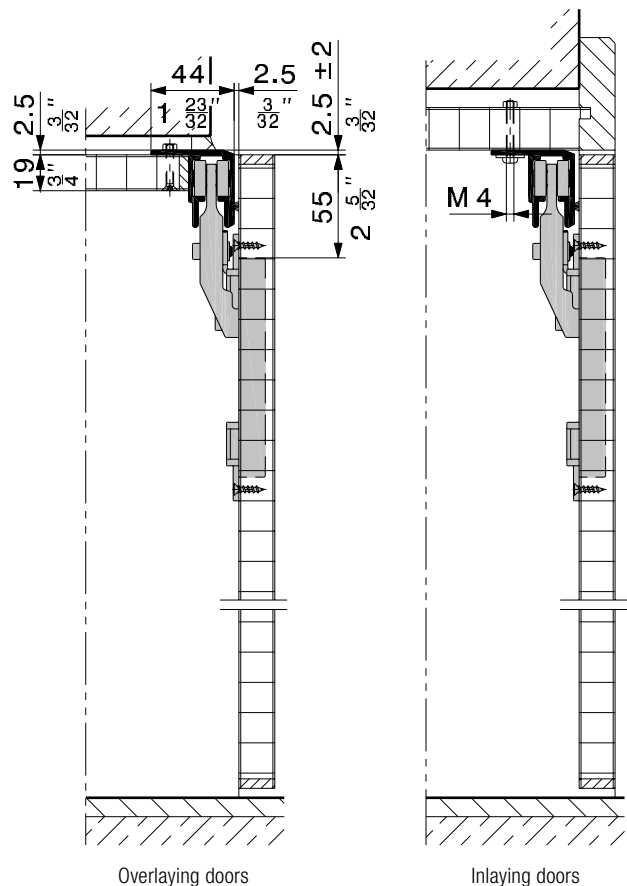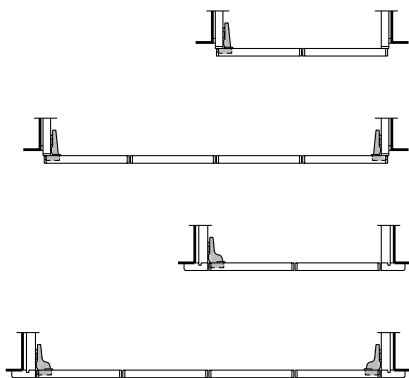


Overlaying doors

Inlaying doors

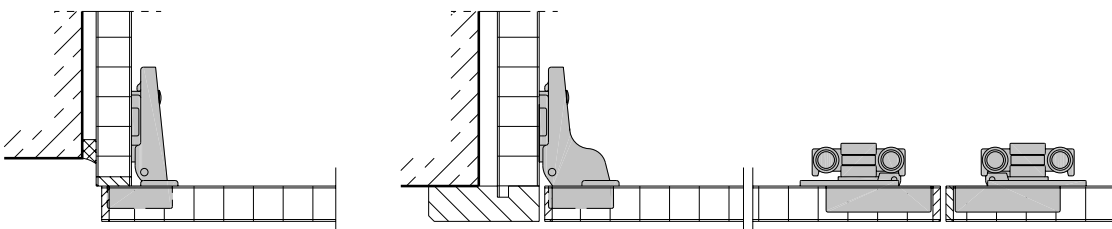

Subject to modification. Metric specifications are exact. Inches are approximate.

Arrangement and number of hinges

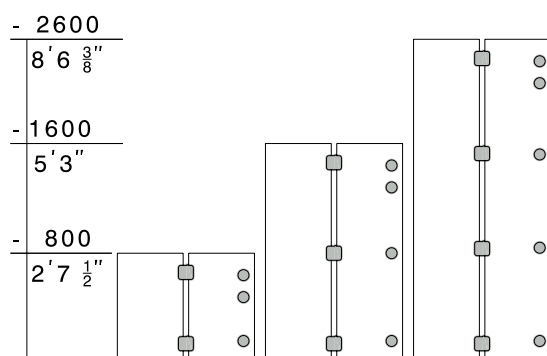

On the outer side commercially available concealed spring-loaders hinges for inset doors, $\leq 120^\circ$, may be used


Sets

	panel	code
Hawa Multifold 30 W, Set for «walk-in cabinet», with top track	2	15569
Hawa Multifold 30 W, Set for «walk-in cabinet», without top track	2	18286

Set comprising

Caution: Hole positions vary		15569	18286	code
	Trolley with 2 plastic tyred wheels and 2 guide rollers	1	1	15032
	Suspension unit	1	1	15029
	Set of countersunk head pressure screws 4 x 16 mm ($\frac{5}{8}$ " x $\frac{5}{8}$ "), 6-piece set	1	1	14172
	Set of fixing screws, 3-piece set	1	1	15657
	Centre hinge, dull nickel finish, with fixing screws	4	4	15041
	Door catch, plastic black, with fixing screws	1	1	15033
	Retaining bumper on top	1	1	14960
	Panel surface equaliser, plastic black, 2-piece set	1	1	14906
	Surface equalizer for side wall	1	1	17266
	Top track 1100 mm ($3'7 \frac{5}{16}$ "), alu plain anodized, predrilled, with brush seal	1	—	15014

Vertical sealing profile

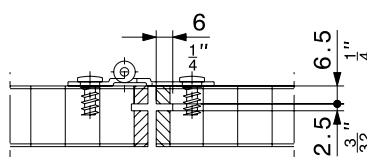

Grooves for vertical sealing profile

Vertical profiles, styrene-butadiene rubber (SBR)

			code
	Seal profile, white, similar RAL 9010	5-m roll ($16'4 \frac{3}{32}$ ")	15227
	Seal profile, black, similar RAL 9011	5-m roll ($16'4 \frac{3}{32}$ ")	15224

Top tracks

Caution: Hole positions vary		mm/inch	code
	Top track, alu plain anodized, predrilled, with brush seal	1100 ($3'7 \frac{5}{16}$ ")	15014
		1800 ($5'10 \frac{7}{8}$ ")	15015
		2500 ($8'2 \frac{7}{16}$ ")	15016
		6000 ($19'8 \frac{1}{32}$ ")	15288

Accessories

			code
	Concealed hinge, dull nickel finish, 110° (inset panels)		14528
	Concealed hinge, dull nickel finish, 120° (overlying panels)		15059
	Furniture bar bolt lock, 27/110/8 mm ($1 \frac{1}{16}$ "/4 $\frac{3}{4}$ "/ $\frac{5}{16}$ "), nickel finish, with 1 EURO key, 2 half-round rods, 1500 mm ($4'11 \frac{1}{16}$ ") strike plates (simultaneous locking)	left	20875
		right	20876
	Furniture bar bolt lock, 27/110/8 mm ($1 \frac{1}{16}$ "/4 $\frac{3}{4}$ "/ $\frac{5}{16}$ "), nickel finish, with Kaba-8-cylinder (length 25 mm [$\frac{1 1}{8}$ "]) 1 press-fit sleeve, 2 keys, 2 half-round rods, 1500 mm ($4'11 \frac{1}{16}$ "), rod guides and strike plates (separate locking)	left	20873
		right	20874
	Mortising template for cup recesses		14761

Order specifications

- Type and number of set
- Number of rolls and type of vertical seal profiles
- Type and number of accessories
- Whether with or without mortising template

Planning/installation

Please use for planning and execution the installation instructions code 15567. Each set contains installation instructions.
(→ www.hawa.ch → Hawa Productfinder)