

Fitting for top-running glass doors up to 100 kg (220 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall mounting.

Product highlights



Comfort

Smooth, quiet sliding and gentle stopping of the door with integrated soft and self closing system



Productivity

No glass processing thanks to clamping shoe connection

Technical specifications



Max. 100 kg (220 lbs.)




Max. 2700 mm (8'10 5/16")






Max. 1600 mm (5'3")



8–12.7 mm (5/16" to 1/2")

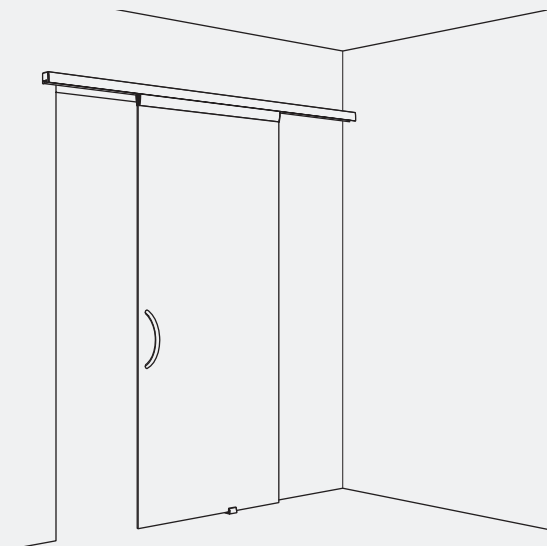

Installation examples

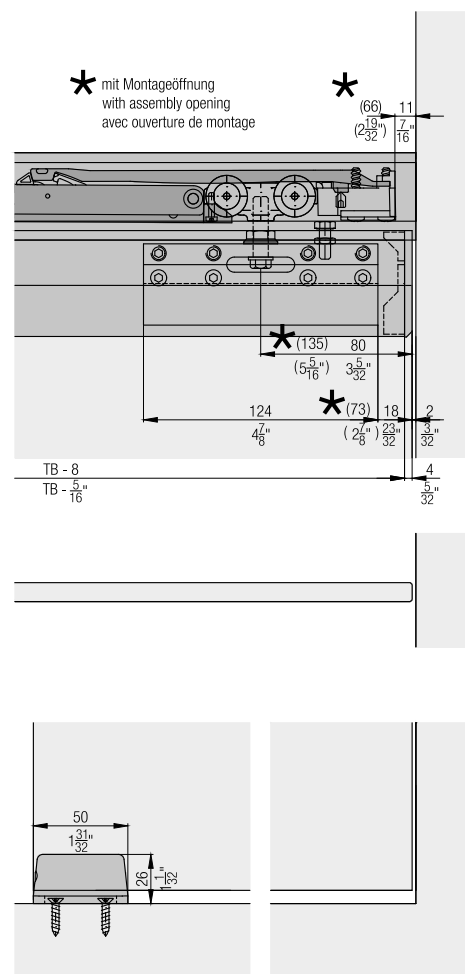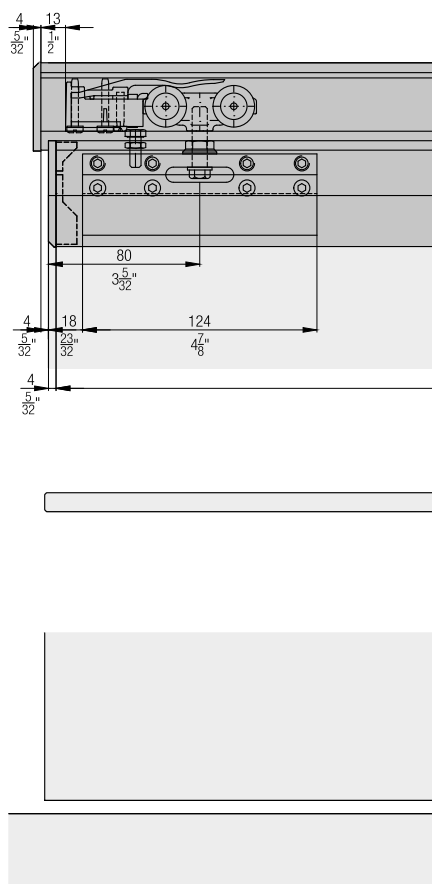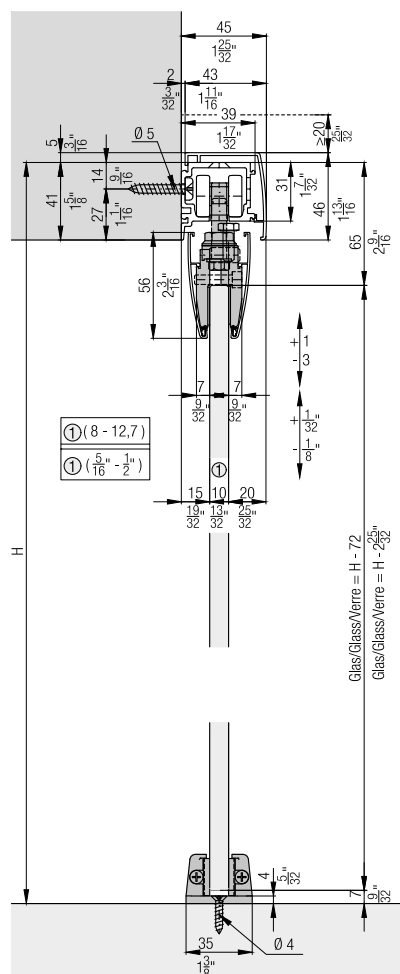


**Set for ceiling mounting,
for 1 glass door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 G/GU/GM/GF, for 1 door	057.3074.071



Set consisting of:

		057.3074.071	No.
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	1	057.3073.072
	Stopper, without retention spring, plastic, gray	1	057.3073.071
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	768.9005.101
	Clamping shoe, aluminum, glass thickness 8–12.7 mm (5/16"-1/2")	2	057.3032.075
	Hexagon screw, M6x20 mm, plastic, white	2	762.9480.000
	Hexagon jam nut, M6, steel, zinc-plated	2	768.2001.101
	Bottom guide, playfree adjustable, chrome-plated, matt	1	057.3030.071
	Wall buffer, 19x10 mm (3/4"x13/32"), rubber, black	1	024.0002.046
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	3	766.5042.120

Running tracks

		mm (inch)	No.
	Combi running track, aluminum, pre-drilled	1,700 (5' 6 15/16")	057.3048.170
		2,000 (6' 6 3/4 ")	057.3048.200
		2,500 (8' 2 7/16")	057.3048.250
		3,500 (11' 5 25/32")	057.3048.350
		6,000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990

Panels

		mm (inch)	No.
	Design-panel, aluminum, anodized	2,500 (8' 2 7/16")	057.3070.250
		6,000 (19' 8 7/32")	057.3070.600
		cut to size	057.3070.990
	Clip-on panel, for clamping shoe, aluminum, anodized	2,500 (8' 2 7/16")	057.3039.250
		6,000 (19' 8 7/32")	057.3039.600
		cut to size	057.3039.990

End cap set

	No.
End cap for panels	057.3061.071





		057.3061.071	No.
	End cap, left for panel, plastique, anthracite	2	057.3059.001
	End cap, right for panel, plastique, anthracite	2	057.3059.002
	End cap holder, plastic, anthracite	2	057.0141.001
	End cap, left for design-panel, plastic, anthracite	1	057.3071.001
	End cap, right for track, plastic, anthracite	1	057.3071.002
	Clip to panel, plastic, gray	4	057.3060.001
	Plate, steel, zinc-plated	2	057.3077.101
	Head cap screw, M5x18 mm (3/16"x23/32"), steel, zinc-plated	8	600.0000.661
	Head cap screw, M5x20 mm (3/16"x25/32"), steel, zinc-plated	8	763.0508.120
	Thread rolling rounded head screw, M5x16 mm (3/16"x5/8"), steel, zinc-plated	2	600.0000.168

Soft close

For soft closing in opening and closing direction
order 2 sets.

	No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.), 1 piece	042.3102.072



Set consisting of:

	042.3102.071	042.3102.072	No.
 Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
 Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
 Screw set soft close	1	1	600.0000.566
 Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072

Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071

Set consisting of:





	042.3114.071	No.
 Cover cap assembly opening, plastic, gray	1	042.0172.001
 Screw set soft close	1	600.0000.566

Bottom guide


Adjustable without play for wall mounting

	No.
 Bottom guide wall mounting, adjustable free from play	057.3015.175



Accessories

	No.
 Bottom door stopper, with centering, chrome-plated, matt	20773
 Routing jig for assembly opening	042.3118.071
 Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
 Track cleaner, plastic, blue	057.3099.071


Bottom door stopper



Wall mounting bottom guide



Soft close

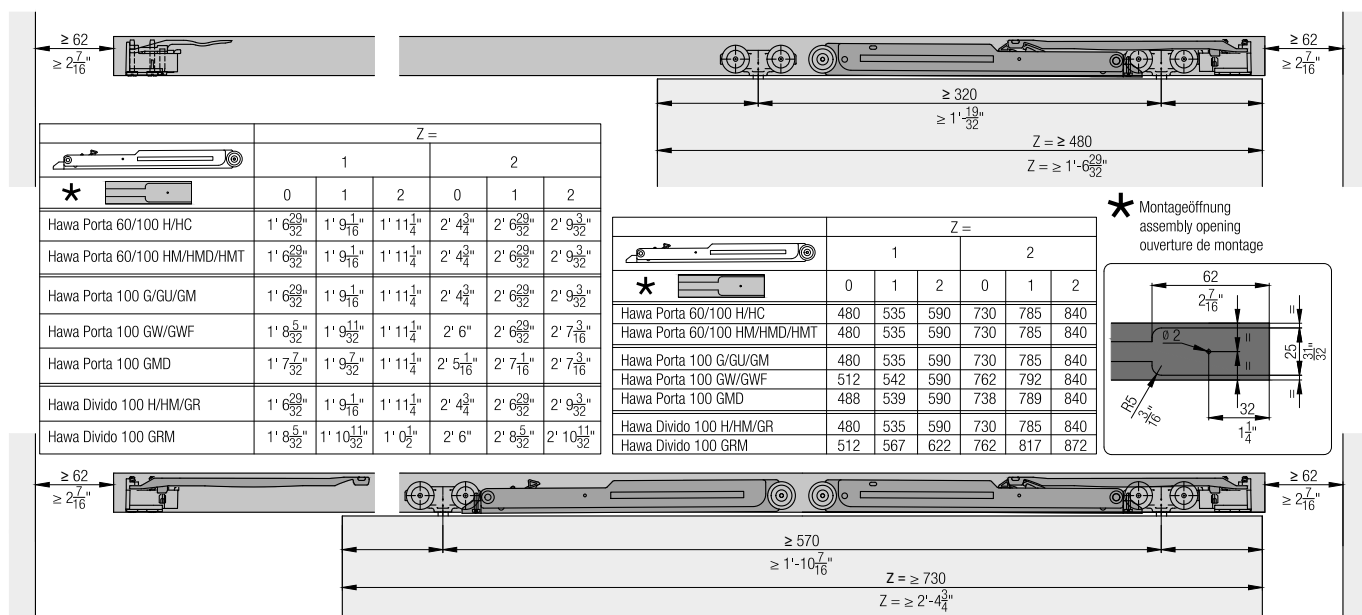

Accessories

- Lock solutions from page 479
- General accessories from page 487
- Glass recommendations from page 504

Planning/execution

Further information about the product can be found on www.hawa.com.