








Fitting for top-running wooden doors up to 60 kg (132 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Ceiling mounting. Minimal installation height.

**Product highlights**


-  **Flexibility** Ceiling-integrated or surface-mounted installation with the same system
-  **Productivity** Tool-less door mounting

**Technical specifications**

-  Max. 60 kg (132 lbs.)
-  Max. 2700 mm (8'10 5/16")
-  Max. 1600 mm (5'3")
-  30–80 mm (1 3/16" to 3 5/32")

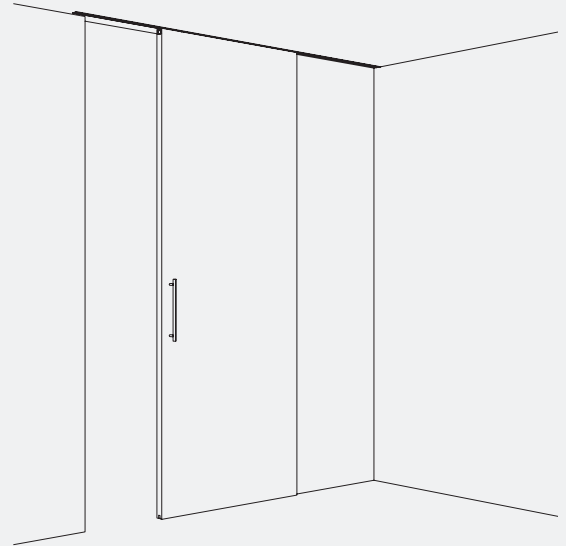

**Installation examples**

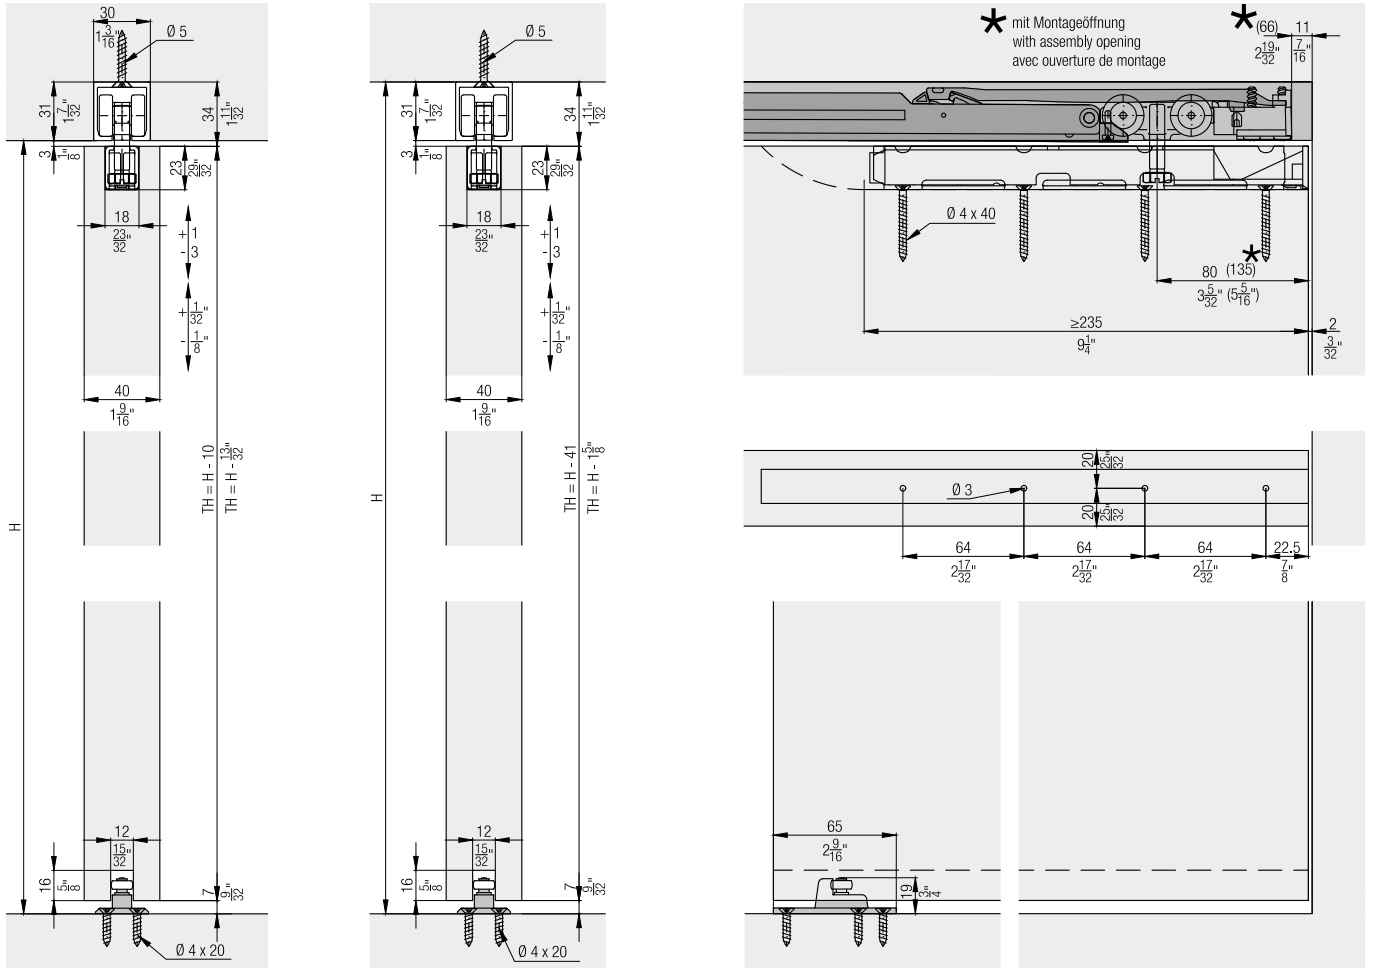

**Set for ceiling mounting,  
for 1 wooden door up to 60 kg (132 lbs.)**

	No.
Hawa Porta 60 HM/HMD, minimal installation height, for 1 door	057.3133.072











**Set consisting of:**

		057.3133.072	No.
	Running gear, plain bearings, rollers plastic blue	2	057.3115.071
	Stopper, with retention spring, plastic, gray	2	057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	2	042.0165.101
	Cover cap, plastic, grey	2	600.0000.533
	Running gear holder, plastic, anthracite	2	042.0167.001
	Housing, steel, zinc-plated	2	042.0166.101
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated	8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4	766.5042.120






**Set for ceiling mounting,  
for 1 wooden door up to 60 kg (132 lbs.)**

	No.
Hawa Porta 60 HM, minimal installation height, with running track, 2000 mm (6' 6 3/4"), aluminum, for 1 door	057.3134.071




**Set consisting of:**

		mm (inch)	057.3134.071	No.
	Running gear, plain bearings, rollers plastic blue		2	057.3115.071
	Stopper, with retention spring, plastic, gray		2	057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated		2	042.0165.101
	Cover cap, plastic, grey		2	600.0000.533
	Running gear holder, plastic, anthracite		2	042.0167.001
	Housing, steel, zinc-plated		2	042.0166.101
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated		8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite		1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	766.5042.120
	Running track, aluminum, pre-drilled	2,000 (6' 6 3/4 ")	1	057.3016.200



**Running tracks**

		mm (inch)	No.
	Running track, aluminum, pre-drilled	1,700 (5' 6 15/16")	057.3016.170
		2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16")	057.3016.250
		6,000 (19' 8 7/32")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16")	057.3016.251
		6,000 (19' 8 7/32")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3016.256
		cut to size	057.3016.998
	Running track, ceiling integration, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	27668
		3,500 (11' 5 25/32")	27667
		6,000 (19' 8 7/32")	30326
		cut to size	27669
	Disposable cover to running track Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990



**Soft close**
**For soft closing in opening and closing direction  
order 2 sets.**

	No.
Soft close Hawa Porta 60/100, Divido 100, 10-60 kg (22-132 lbs.), 1 piece	042.3102.072
	No.
<b>Set consisting of:</b>	042.3102.072
 Soft close, top running, 10-60 kg (22 to 132 lbs.), plastic	1 042.3106.072
 Trigger for soft close in buildings, zinc die casting	1 042.3105.001
 Screw set soft close	1 600.0000.566




**Cover for assembly opening**

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071
	No.
<b>Set consisting of:</b>	042.3114.071
 Cover cap assembly opening, plastic, gray	1 042.0172.001
 Screw set soft close	1 600.0000.566

**Screw set**

	No.
Screw set for ceiling integration, +15 mm (+19/32")	057.3180.071
	No.
<b>Set consisting of:</b>	057.3180.071
 Hexagon screw, M8x51 mm (5/16"x2"), steel, zinc-plated	2 042.0165.103
 Head cap screw, M8x50 mm (5/16"x1 31/32"), steel, zinc-plated	1 042.0175.002

**Accessories**

		No.
	Routing jig for assembly opening	042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
	Track cleaner, plastic, blue	057.3099.071

**Soft close**

*	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	1' 6 <sup>29</sup> / <sub>32</sub> "	1' 9 <sup>1</sup> / <sub>16</sub> "	1' 11 <sup>1</sup> / <sub>4</sub> "	2' 4 <sup>3</sup> / <sub>4</sub> "	2' 6 <sup>29</sup> / <sub>32</sub> "	2' 9 <sup>3</sup> / <sub>32</sub> "
Hawa Porta 60/100 HM/HMD/HMT	1' 6 <sup>29</sup> / <sub>32</sub> "	1' 9 <sup>1</sup> / <sub>16</sub> "	1' 11 <sup>1</sup> / <sub>4</sub> "	2' 4 <sup>3</sup> / <sub>4</sub> "	2' 6 <sup>29</sup> / <sub>32</sub> "	2' 9 <sup>3</sup> / <sub>32</sub> "
Hawa Porta 100 G/GU/GM	1' 6 <sup>29</sup> / <sub>32</sub> "	1' 9 <sup>1</sup> / <sub>16</sub> "	1' 11 <sup>1</sup> / <sub>4</sub> "	2' 4 <sup>3</sup> / <sub>4</sub> "	2' 6 <sup>29</sup> / <sub>32</sub> "	2' 9 <sup>3</sup> / <sub>32</sub> "
Hawa Porta 100 GW/GWF	1' 8 <sup>5</sup> / <sub>32</sub> "	1' 9 <sup>11</sup> / <sub>32</sub> "	1' 11 <sup>1</sup> / <sub>4</sub> "	2' 6"	2' 6 <sup>29</sup> / <sub>32</sub> "	2' 7 <sup>3</sup> / <sub>16</sub> "
Hawa Porta 100 GMD	1' 7 <sup>7</sup> / <sub>32</sub> "	1' 9 <sup>7</sup> / <sub>32</sub> "	1' 11 <sup>1</sup> / <sub>4</sub> "	2' 5 <sup>1</sup> / <sub>16</sub> "	2' 7 <sup>1</sup> / <sub>16</sub> "	2' 7 <sup>3</sup> / <sub>16</sub> "
Hawa Divido 100 H/HM/GR	1' 6 <sup>29</sup> / <sub>32</sub> "	1' 9 <sup>1</sup> / <sub>16</sub> "	1' 11 <sup>1</sup> / <sub>4</sub> "	2' 4 <sup>3</sup> / <sub>4</sub> "	2' 6 <sup>29</sup> / <sub>32</sub> "	2' 9 <sup>3</sup> / <sub>32</sub> "
Hawa Divido 100 GRM	1' 8 <sup>5</sup> / <sub>32</sub> "	1' 10 <sup>11</sup> / <sub>32</sub> "	1' 0 <sup>1</sup> / <sub>2</sub> "	2' 6"	2' 8 <sup>5</sup> / <sub>32</sub> "	2' 10 <sup>11</sup> / <sub>32</sub> "

*	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM	480	535	590	730	785	840
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

Beidseitig gedämpfte Ausführungen ohne stirnseitigen Zugang erfordern zwei Montageöffnungen.  
 Versions with soft closing mechanism at both sides without access from the leading edge require two assembly openings.  
 Les versions avec amortissement bilatéral sans accès frontal exigent deux ouvertures de montage.

Montageöffnung  
 assembly opening  
 ouverture de montage

**Ceiling integration**

Recommendation: For systems integrated into the ceiling, provide assembly openings or front access to the system.

Abdeckung Montageöffnung bauseitig  
 Cover assembly opening on site  
 Cache ouverture de montage sur site

Abdeckung Montageöffnung bauseitig  
 Cover assembly opening on site  
 Cache ouverture de montage sur site

**Accessories**

- Lock solutions from page 479
- General accessories from page 487

**Planning/execution**

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).