Fitting for 2 top-running wooden doors up to 16 kg (35 lbs.), with screwed on or groove mounted running track. With soft and self closing mechanism. Design Inslide.

Product highlights

Comfort Smooth, silent running with Comfort Roller and soft

and self closing system for different door weights

Productivity Efficient thanks to tool-less door installation

as well as easy, intuitive adjustment


Technical specifications

Max. 16 kg (35 lbs.)


↑ Max. 1400 mm (4'7 1/8")

★ Max. 1000 mm (3'3 3/8")

↑ ← 16–19 mm (5/8" to 3/4")



Installation examples

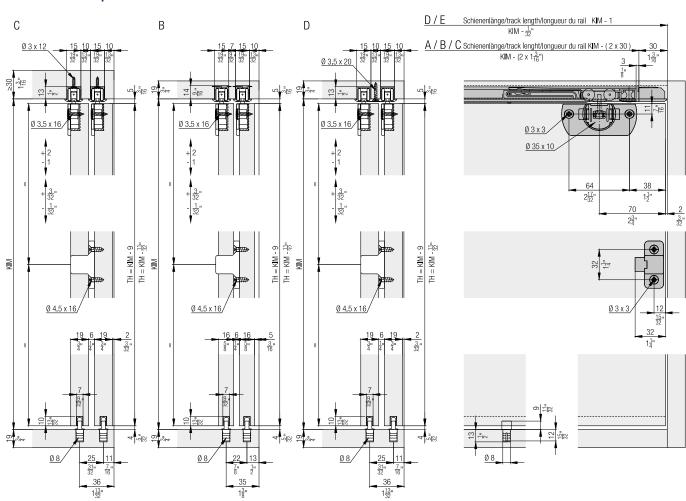

Set for 2 wooden doors up to 16 kg (35 lbs.), with height adjustment

	No.		
Hawa Clipo 16 H IS, for 2 doors		053.3220.071	
Set consisting	of:	053.3220.071	No.
	Hawa Clipo 16 H/Hawa Regal 16 C running gear, plastic, anthracite	4	053.3205.071
South State of the	Hawa Clipo 16/Hawa Regal 16 C stopper, plastic, gray	2	053.3215.071
	Housing, plastic, anthracite	4	053.0183.001
213	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	8	766.6052.100
	Door follower, plastic, anthracite	1	053.3217.071
	Flat countersunk head chipboard screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated	2	600.0000.478
	Hawa Clipo 16 H bottom guide, plastic, anthracite	2	053.3214.001

Running tracks

		mm (inch)	No.
		2,500 (8' 2 7/16'')	053.3229.250
	A: Single running track, for glue fixing, aluminum	3,500 (11' 5 25/32'')	053.3229.350
		6,000 (19' 8 7/32'')	053.3229.600
	B: Single running track, with swivel-lug, aluminum (not for hard wood/MDF)	2,500 (8' 2 7/16")	053.3227.250
	B: Single running	3,500 (11' 5 25/32'')	053.3227.350
	track, with swivel-lug, aluminum	6,000 (19' 8 7/32'')	053.3227.600
/ ///	C: Single running track, aluminum, pre-drilled	2,500 (8' 2 7/16'')	053.3225.250
		3,500 (11' 5 25/32'')	053.3225.350
		6,000 (19' 8 7/32'')	053.3225.600
		2,500 (8' 2 7/16'')	053.3226.250
	D: Double running track, aluminum, pre-drilled	3,500 (11' 5 25/32'')	053.3226.350
		6,000 (19' 8 7/32'')	053.3226.600
11111		2,500 (8' 2 7/16'')	053.3231.250
	E: Double running track, aluminum, anodized, pre-drilled	3,500 (11' 5 25/32'')	053.3231.350
*4		6,000 (19' 8 7/32'')	053.3231.600

Track end piece set for single running tracks

				No.
Track end piece	, for screw fixing, plastic, gr	ray		053.3210.081
Track end piece	, with swivel lug, plastic, gra	ay		053.3211.081
Set consisting	of:	053.3210.081	053.3211.081	No.
	Track-end piece, for screw fixing, plastic, grey	2		053.3210.001
	Track-end piece, with swivel lug, plastic, grey		2	053.3211.071

Guide tracks

	mm (inch)	No.
	2,500 (8' 2 7/16'')	053.3012.250
Guide track, groove width 7 mm (9/32"), plastic, anthracite	3,500 (11' 5 25/32'')	053.3012.350
	6,000 (19' 8 7/32'')	053.3012.600

Soft close up to 8/16 kg (17/35 lbs.)

	No.
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 8 kg (17 lbs.)	053.3332.071
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 16 kg (35 lbs.)	053.3332.072

Set consisting	of:	053.3332.071	053.3332.072	No.
	Damper, up to 8 kg (17 lbs.)	2		053.3330.071
3	Trigger, with stopper	2	2	053.3331.071
	Cross recessed pan head screw, 2.2x8 mm (3/32"x5/16"), steel, zinc-plated	2	2	600.0000.482
	Damper, up to 16 kg (35 lbs.)		2	053.3330.072

Guide tracks 4-point guidance

	mm (inch)	No.
Single guide track, for glue fixing, aluminum, anodized	6,000 (19' 8 7/32'')	053.3296.600

Components 4-point guidance

		No.	
	Bottom guide Hawa Clipo IS/Hawa Regal C 16, plastic, anthracite	040.3124.071	
	Stopper guide track, plastic, grey	053.5094.071	

Door centering

			No.
Door centering,	Door centering, plastic, anthracite, for 2 doors		053.3207.071
Set consisting	of:	053.3207.071	No.
	Housing door centering, plastic, anthracite	2	053.5014.001
	Pin door centering, plastic, anthracite	2	053.0171.001
0	Rubber buffer, plastic, grey	1	025.0107.001

Accessories

	No.
Housing Hawa Clipo 16, press-fit, plastic, anthracite	083.3009.002
Track cleaner, plastic, red	040.3142.071

Hawa Clipo 16 H IS

