

**Fitting for 2-3 top-running wooden doors up to 65 kg (143 lbs.) with screwed on running track. Optional soft close integrated in track. Design Inslide top-running**

## Product highlights



## Comfort

Smooth, silent running with EKU Comfort roller

Sophisticated soft closing system and innovation arrangement of the components for very easy operation

## Technical specifications



Max. 65 kg (143 lbs.)




Max. 2600 mm (8'6 3/8")










Max. 1400 mm (4'7 1/8")



Min. 25-40 mm (31/32" to 1 9/16")

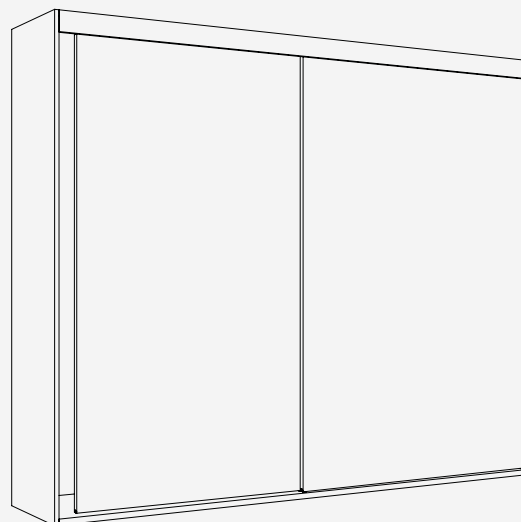



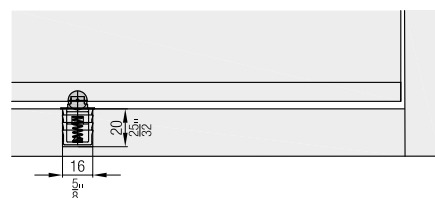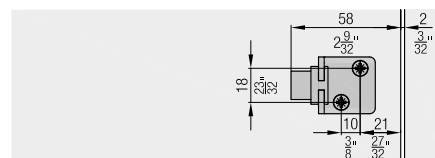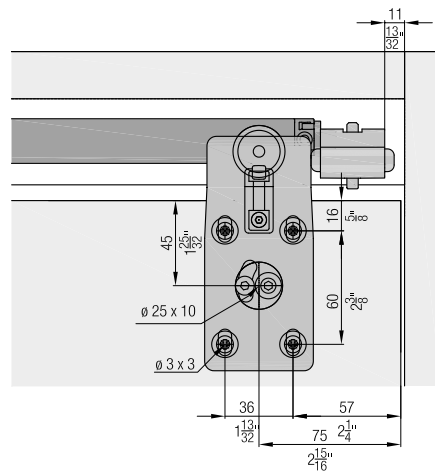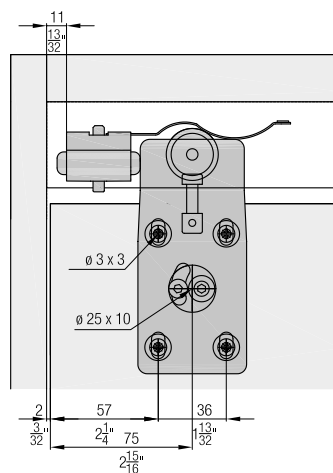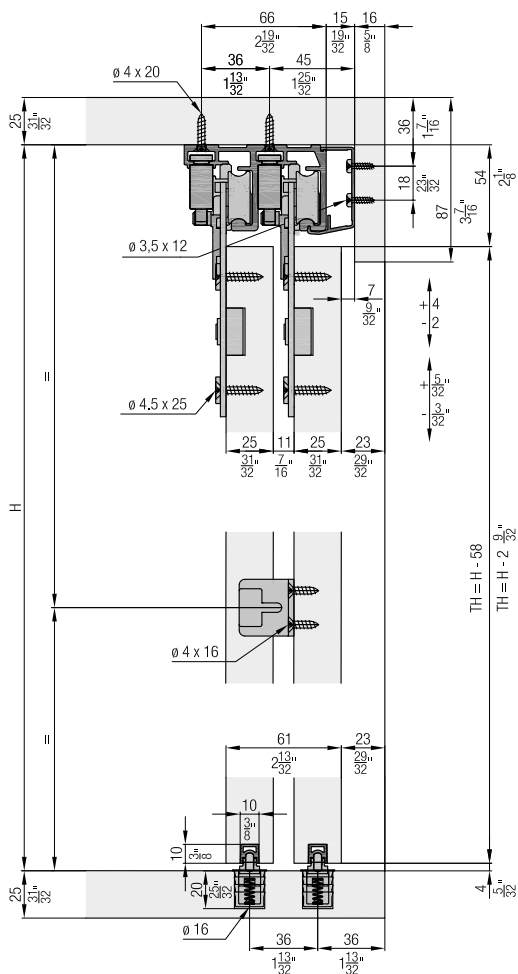






## Installation examples



**Set for 2 or 3 wooden doors**

	Nr.
EKU Combino 65 H IS, for 2 doors, door thickness 25-40 mm (31/32"-1 9/16")	055.3202.071
EKU Combino 65 H IS, for 3 doors, door thickness 25-40 mm (31/32"-1 9/16")	055.3202.072





**Set consisting of:**

		055.3202.071	055.3202.072	Nr.
	Running gear, steel, zinc-plated	4	6	055.3152.071
	Bottom guide, plastic, gray	2	3	055.3081.071
	Stopper, plastic, gray	4	4	055.3153.071
	Retention spring for stopper, steel	2	3	055.3190.071
	Door follower, with 2 doors, steel, zinc-plated	1		055.3124.071
	Centering disk, plastic, white	16	24	055.0110.001
	Countersunk head screw, 4.5x25 mm, steel, zinc-plated	16	24	766.5045.125
	Thread-cutting rounded head screw, M4x8 mm, steel, zinc-plated	2	3	762.7009.100
	Buffer, with adhesive, 2-piece set		1	053.3364.051


**Track sets, 25 mm (31/32")**

	Nr.
EKU Combino 65 H IS, 2500 mm (8'2 7/16")	055.3208.071
EKU Combino 65 H IS, 4000 mm (13'1 15/32")	055.3208.072


**Set consisting of:**

		mm (inch)	055.3208.071	055.3208.072	Nr.
	Double running track, aluminum, anodized, pre-drilled	2500 (8'2 7/16")	1		055.3143.250
	Guide track, plastic, gray, for glue fixing	2500 (8'2 7/16")	1		055.3171.250
	Double running track, aluminum, anodized, pre-drilled	4000 (13'1 15/32")		1	055.3143.400
	Guide track, plastic, gray, for glue fixing	1450 (4'9 3/32")		3	055.3171.145

**Running tracks, from a door thickness of 28 mm (1 3/32")**


		mm (inch)	Nr.
	Single running track, aluminum, anodized, pre-drilled	2500 (8'2 7/16")	055.3162.250
		4000 (13'1 15/32")	055.3162.400

**Guide tracks**

		mm (inch)	Nr.
	Guide track, plastic, gray, for glue fixing	2500 (8'2 7/16")	055.3171.250
		3500 (11'5 25/32")	055.3171.350
		6000 (19'8 7/32")	055.3171.600



## Soft close

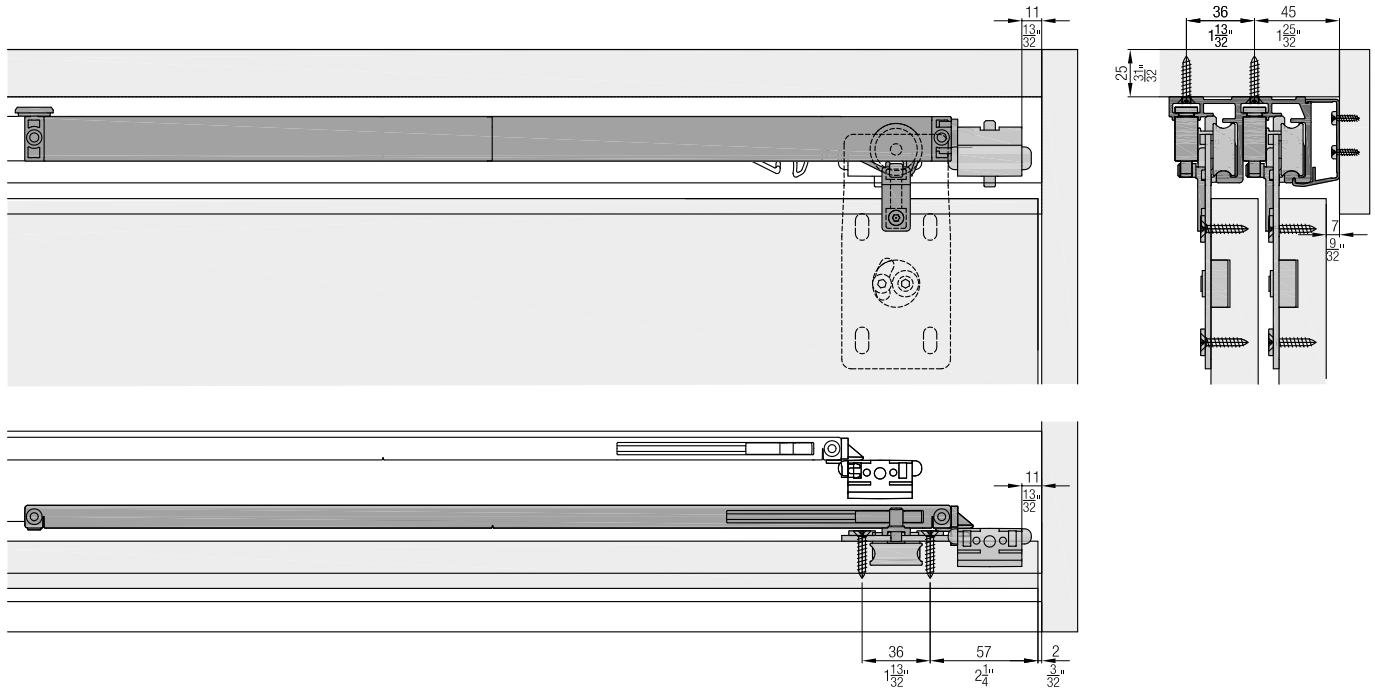

### Accessories

- Order overview soft closes page 88–89
- Straightening fitting page 90–91

### Ordering information

- Type and number of sets
- Type and number of track sets
- or
- Type and number of running tracks
- Type and number of guide tracks

### Optional ordering information

- Number of soft closes
- Number of door centerings
- Number of clip-on elements

### Planning/execution

Installation instructions No. 788.2000.307 have to be used for planning and execution. Further information about the product can be found on [www.hawa.com](http://www.hawa.com).