Fitting for top-running glass doors up to 100 kg (220 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall or ceiling mounting.

Product highlights

Flexibility Wall and ceiling mounting with aluminium

or wooden panel

Aesthetics The entire technology is concealed behind

plain panels


Technical specifications

Max. 100 kg (220 lbs.)


↑ Max. 2700 mm (8'10 5/16")


★ Max. 1600 mm (5'3")


→ ← 8–12.7 mm (5/16" to 1/2")




Installation examples

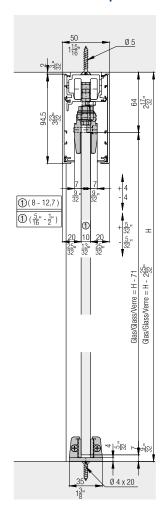

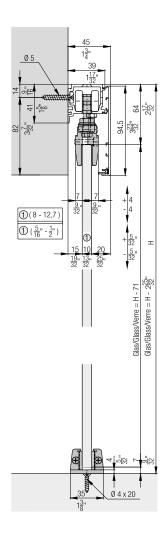





Set for ceiling or wall mounting, for 1 glass door up to 100 kg (220 lbs.)

			No.
Hawa Porta 100 G/GU/GM/GF, for 1 door			057.3074.071
Set consisting	Set consisting of:		No.
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	1	057.3073.072
	Stopper, without retention spring, plastic, gray	1	057.3073.071
6	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	057.0123.104
8	Hexagon locking nut, M8, steel, zinc-plated	2	768.9005.101
	Clamping shoe, aluminum, glass thickness 8–12.7 mm (5/16"-1/2")	2	057.3032.075
	Hexagon screw, M6x20 mm, (1/4"x25/32") plastic, white	2	762.9480.000
	Hexagon jam nut, M6, steel, zinc-plated	2	768.2001.101
	Bottom guide, playfree adjustable, chrome-plated, matt	1	057.3030.071
(b)	Wall buffer, 19x10 mm (3/4"x13/32"), rubber, black	1	024.0002.046
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	3	766.5042.120

Running tracks

		mm (inch)	No.
		1,700 (5' 6 15/16'')	057.3048.170
		(6' 6 3/4 '')	057.3048.200
	Combi running track,		057.3048.250
	aluminum, pre-drilled	3,500 (11' 5 25/32'')	057.3048.350
		6,000 (19' 8 7/32'')	057.3048.600
		cut to size	057.3048.990

Panels

		mm (inch)	No.
	Clip-on panel,	2,500 (8'2 7/16'')	057.3050.250
		3,500 (11'5 25/32'')	057.3050.350
	aluminum, anodized	6,000 (19'8 7/32'')	057.3050.600
		cut to size	057.3050.990
	Screening seal for fascias, plastic, black	20,000 (65' 7 13/32'')	057.3078.002

Clip-on components

	NO.
Clip component for wooden and aluminum panel, every 500 mm (1'7 11/16"), aluminium, pre-drilled	057.3117.001

Panel end component set, 44.5 mm (1 25/32"), aluminum

			,
			No.
Panel end component set, 44.5 mm (1 25/32"), one-sided, wall mounting			057.3052.074
Set consisting	of:	057.3052.074	No.
	Panel end component, 44.5 mm (1 25/32"), aluminum, anodized	1	057.3052.904
(a)	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171
0 0	Bracker connector, steel, zinc-plated	2	057.3051.101

Panel end component set, 50 mm (1 31/32"), aluminum

	No.
Panel end component set, 50 mm (1 31/32"), one-sided, ceiling mounting	057.3052.071

Set consisting	of:	057.3052.071	No.
	Panel end component, 50 mm (1 31/32"), aluminum, anodized	1	057.3052.901
000	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171

Soft close For soft closing in opening and closing direction order 2 sets.

	No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.), 1 piece	042.3102.072

Set consisting	of:	042.3102.071	042.3102.072	No.
\$ 100	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
\$ 150	Soft close, top running, 10-60 kg (22 to 132 lbs.), plastic		1	042.3106.072

Wall compensation profiles

	mm (inch)	No.
Wall compensation profile, with sealing	2,500 (8' 2 7/16'')	042.3064.071
profile gray, aluminum, anodized	3,000	042.3064.072


Bottom guide Adjustable without play for wall mounting

	No.
Bottom guide wall mounting, adjustable free from play	057.3015.175


Accessories


	No.
Bottom door stopper, with centering, chrome-plated, matt	20773
Track cleaner, plastic, blue	057.3099.071


Wooden panels



Calculations of panels









Hawa Porta 100 G

Bottom guide with zero clearance


Bottom door stopper



Further installation examples



Soft close

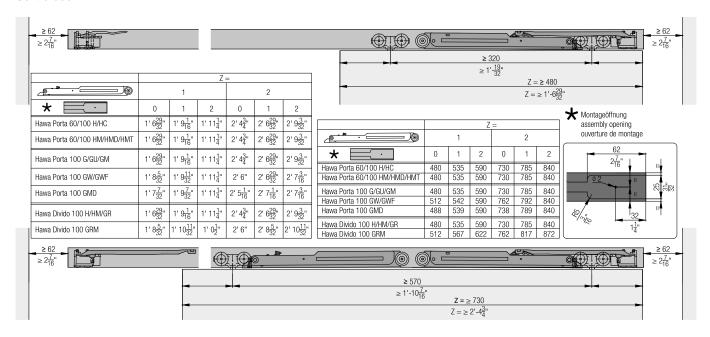

Accessories

- Lock solutions from page 479
- General accessories from page 487
- Glass recommendations from page 504

Planning/execution

Further information about the product can be found on www.hawa.com.